





ACCOMPLISH MORE.

The more you do with your tractor, the more ideas you have for your property. Bobcat compact tractors prepare you for every possibility.

These agile machines are strong enough to work inside and around sheds, barns, animal enclosures and anywhere else the work takes you. With models up to 58 hp, your choice of manual or hydrostatic transmission, plus generous lifting ability, ground clearance and a powerful 3-point hitch with power take-off (PTO), Bobcat brings outstanding performance and value to your property.

From its wheelbase to its length, tire options and overall engineering, your Bobcat compact tractor is powerful and capable while being responsive and comfortable to operate. With top travel speeds as high as 18.5 mph, you'll spend less time moving from one point to another, and you'll make every second count when you have work to get done. And because a hard-working tractor needs hard-working traction, you can easily engage four-wheel drive whenever the work demands it.



Stable Wheelbase

The 71.2-inch wheelbase of the 4000 platform tractors maximizes your towing capacity and optimally distributes weight to each wheel for more stability on hilly terrain.

More Ground Clearance

Class-leading ground clearance improves maneuverability in rough or muddy terrain.

Manual or Hydrostatic Transmission

Pick a model that works for you, with the controls and capabilities that fit your preference, budget and working style.

Manual Synchro Shuttle Transmission

Manual synchro shuttle transmission enables shift-on-the-fly functionality that's similar to a stick-shift automobile. This three-range transmission allows you to clutch and shift across eight forward and eight rear speeds as you travel. It provides ease of use for operators who prefer a manual transmission. It also gives you great performance and ease of use when moving up and down fields or traveling longer distances in one direction.

Hydrostatic Transmission (3-Range HST)

The hydrostatic transmission uses hydraulic pressure to change speed, operating similar to a vehicle. You'll only need to stop moving if you want to change your range. This is a good transmission choice if you're doing frequent front-end loader work, mowing or clearing brush as you maneuver through wooded areas. Its ease of operation also makes it a good choice for novice drivers. Forward and reverse are controlled by foot pedals.

Tight Turning Radius

Maximum maneuverability is the key to effective mowing, tilling and more. Bobcat compact tractors feature a tight turning radius – as little as 8.6 feet – so you can move in close to trees, buildings and other obstacles.

Steering Brakes

Steering brakes are especially useful when you're working between buildings, in pens or barns, or around trees. They assist in maintaining a tight turning radius, nearly pivoting the tractor on the inside wheel.

Drawbar Towing

Bobcat compact tractors deliver competitive drawbar towing power and force for heavy towing performance that beats many other tractor brands.



Tire Options

Three types of tires are available for Bobcat compact tractors. They offer a combination of reliability and ride quality to match the requirements of your work.

Turf Tires

Turf tires are designed with less aggressive tread that minimizes disturbance on lush lawns and established landscaping.

Industrial Tires

Industrial tire tread is wider than agricultural tires, and the lugs are deeper than turf tires. They deliver great traction for all ground conditions and many different applications.

Agricultural Tires

These tough tires have deep lugs for optimal traction and selfcleaning in soft soil and mud. They also deliver more power to the ground when towing heavy loads or pulling implements.

PTO Cruise

PTO cruise allows you to maintain rpm at your preferred setting – even as the tractor's load conditions change.

Adjustable Hitch

The hitch is adjustable to provide towing flexibility and convenience.

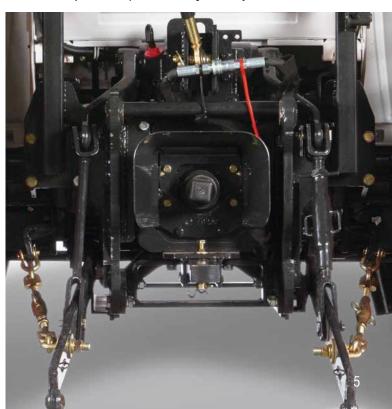


Image shows optional backhoe sub frame installed.

PROTECT YOUR INVESTMENT.

From rugged metal hoods to the solid and sturdy construction of our 3-point hitches to our unmatched dealer support, your Bobcat tractor is up for a challenge.

Polymer Fuel Tank

A heavy-duty polymer fuel tank maintains fuel integrity and eliminates rust-related contamination.

Brush Guard

Included with the optional front-**Metal Hood** end loader and also available separately, the heavy-duty brush guard protects your tractor's front end from debris. branches and other obstacles.

Your chores demand daily ease of maintenance in mind.

attention. Your tractor needs to be ready to work when you are. Bobcat compact tractors are built to contend with the dust, dirt and grit of your toughest challenges, and they're designed with

MINIMIZE YOUR MAINTENANCE.

You buy a tractor to work. It shouldn't be a job to keep it running. Maintenance points on your tractor are easy to find and reach – so upkeep is simple and takes less time. Flip up the metal hood – it opens nearly 90 degrees – to easily access the battery, filters and other checkpoints. Other components are simple to reach and service, allowing you to easily retain peak performance for years.

One-Side Maintenance

All daily checks, engine fluid fills and filters are located on one side of the engine, which makes it easy to keep your tractor running smoothly with minimal effort.

THE BOBCAT DEALER **NETWORK ADVANTAGE**

Bobcat built its brand on quality equipment serviced by reliable local dealers, with warranty repairs and parts availability that are second to none. With the help of our knowledgeable dealers, Bobcat customers have kept machines running for decades doing the toughest jobs imaginable. If you're looking for long-term service and support, take a look at Bobcat compact tractors.

There are no side panels to remove when you need to access your engine. It's as simple as lifting the hood. With the air cylinder assist, it takes little effort. When fully opened, the tractor's hood stands nearly perpendicular to the engine compartment. This provides best-in-class maintenance accessibility and makes virtually all of the major service points easy to reach.

Simplify replacing fuses or troubleshooting electronics with a centralized location for fuses and relays.



great visibility from the operator station, stands up to tough jobs. reliably protecting the engine and components from dirt and debris.

Tier 4 Diesel Engine

The powerful Tier 4 engines offer

robust, high-power performance, plus

an efficient fuel system. You'll enjoy

component life, as well as low noise

and vibration for comfortable work.

reliable tractor start-ups and long

The metal hood, designed to provide







Low Noise, Low Vibration

The engine in your Bobcat compact tractor is designed to produce low noise levels with minimal vibration to keep you working comfortably and focused on the task.

Headlights

Bright headlights illuminate the job for high visibility for evening work and other low light conditions.

LED Tail Lamp

The LED tail lamp provides excellent visibility and long bulb life.

Panoramic Visibility

The open cab provides excellent sightlines to the work and great all-around visibility, with additional simplicity and ease of use for operators who frequently get on or off the tractor throughout the day.

Power and Tilt Steering

Power steering adds near-effortless maneuverability, and the tilt function enables any operator to adjust to the position that feels most comfortable.

Comfortable Operator Station With Ergonomic Controls

The operator station on Bobcat compact tractors is designed to enable hours of comfortable, confident work. All of your controls, gauges and buttons on Bobcat compact tractors are thoughtfully laid out with your ease of use in mind. The illuminated dashboard allows you to operate and easily monitor performance in all light conditions.

Rubber Deck Mat

The rubber mat dampens vibrations through the floor to give you a more comfortable day's work.

Linked Pedal Lever Option

This option is available on tractors with the HST transmission. The linked pedal increases engine rpm as you engage the travel pedal, enabling operation that feels similar to driving a car. This makes for intuitive front-end loader control – and enhances ease of use on a variety of other jobs.

Optional Speed Cruise Control

When grading, raking or traveling longer distances without direction changes, optional speed cruise control holds the travel pedal in place to obtain a more consistent speed with less input. The option is available on tractors with the HST transmission.

Foldable Roll-Over Protective Structure (ROPS) The DODG is designed to protect the

The ROPS is designed to protect the operator in the event of a roll-over (when the ROPS is locked in the up position and the seat belt is fastened). The foldable ROPS can be temporarily lowered when driving under trees, into garages or in other low-clearance areas.



DO MORE WITH ONE MACHINE.

Take on digging, loading and material handling with a strong, easy-to-use front-end loader, and use an array of implements with your 3-point hitch and rear PTO. Your dealer can help you acquire a range of Bobcat implements for the work you do on your land.

From mowing to grading to digging, your property presents endless opportunities to get outside and get something done.
From front to back, Bobcat tractors are well equipped for it.



Optional Telescoping Lower Links

One person can quickly change implements with minimal effort using telescoping lower links and sway bars. It provides the fastest, easiest positioning for lining up your 3-point hitch.

Optional Rear Remote Hydraulics

A rear remote hydraulic valve allows you to gain even more attachment versatility by enabling hydraulic functions used to control or position many implements.

Angled Lower Lift Arms

The lower lift arms provide a forgiving angled design that makes implement hookup quick and easy.



STANDARD QUICK ATTACH MOUNTING SYSTEM

The front-end loader is a must-have for digging, dirt moving, loading and carrying material. On your Bobcat tractor, the front-end loader is easy to attach and remove, plus it delivers leading lift capacity and height for exceptional productivity.

Its quick attach mounting system enables you to use a variety of attachments. With a quick change, you can gear up for more tasks and bring more value and versatility to your property. Front-end loaders are equipped with float functionality to follow ground contours as you work.

Rear PTO and 3-Point Hitch

The 3-point hitch is a key to your tractor's versatility. It enables you to do a large number of tasks on your property with both drag-behind and PTO-powered implements.

Flip-Up PTO Guard

The flip-up PTO guard ensures easy attachment installation while providing operator protection during use.

External 3-Point Control Lever

You can easily raise and lower the 3-point hitch lift arms using the height control lever, located behind the machine.





IMPLEMENTS AND ATTACHMENTS

Hard-working Bobcat implements and attachments are made to handle the numerous possibilities you uncover on your land.



Backhoe

12

Turn your Bobcat compact tractor into a powerful part-time excavator with this handy attachment. The backhoe is great for general purpose digging and trenching. Sub frame included.

| Model | BH86 |
|--|----------------------|
| Digging Depth (2' flat bottom) | 94.3 in. (2397 mm) |
| Reach From Center Line of Swing Pivot | 125.3 in. (3184 mm) |
| Loading Height (bucket at 60°) | 76.3 in. (1939 mm) |
| Max. Leveling Angle | 10° |
| Swing Arc | 180° |
| Max. Transport Height | 86.6 in. (2199 mm) |
| Bucket Rotation | 170° |
| Stabilizer Spread (down position) | 73.3 in. (1862 mm) |
| Stabilizer Spread (up position) | 69.0 in. (1752 mm) |
| Bucket Digging Force | 3532 lbf. (15,711 N) |
| Operating Pressure | 2249 psi (155 bar) |
| Shipping Weight (without bucket) | 1102 lb. (499 kg) |



Front-End Loader

The front-end loader is a must-have for digging, dirt moving, loading and carrying material. The Bobcat front-end loader is easy to attach and remove, plus it delivers leading lift capacity and height for exceptional productivity.

| Model | FL9 |
|---|---------------------|
| Max. Lift Height to Pivot Pin | 104.6 in. (2658 mm) |
| Max. Lift Height Under Level Bucket | 95.2 in. (2419 mm) |
| Clearance With Bucket Dumped | 77.0 in. (1958 mm) |
| Reach at Max. Lift Height | 10.5 in. (269 mm) |
| Max. Dump Angle | 51° |
| Reach With Bucket on Ground | 68.0 in. (1727 mm) |
| Max. Rollback Angle | 36° |
| Digging Depth | 7.8 in. (200 mm) |
| Lift Capacity at Pivot Pin (max. height) | 1795 lb. (814 kg) |
| Breakout Force at Pivot Point | 4136 lb. (1876 kg) |
| Weight | 1202 lb. (545 kg) |
| Bucket Width | 66.0 in. (1676 mm) |



Front Mount Snowblower

The front mount snowblower gives you powerful snow-clearing ability with the convenience of a quick attach mount. Powered by your tractor's mid-mount PTO* (mid-mount PTO required), this attachment cuts a wide path through deep, heavy snow. Having the snowblower mounted to the front of the tractor offers greater operator comfort. Direct snow exactly where you want it with the hydraulic chute rotation.

| Model | FSB72** | | |
|--|--|--|--|
| Overall Width | 73.7 in. (1873 mm) | | |
| Cutting Width | 72.0 in. (1828 mm) | | |
| Cutting Height (blower on the ground) | 24.5 in. (622 mm) | | |
| Auger Diameter | 14.0 in. (356 mm) | | |
| Fan Diameter | 20.0 in. (508 mm) | | |
| Chute Rotation (hydraulic) | 230° | | |
| Deflector Adjustment (manual) | 90° | | |
| Weight | 620 lb. (282 kg) | | |
| Drive | Mid-PTO | | |
| Driveline Protection | Shear Bolt | | |
| Recommended HP Range | 45.0-60.0 hp (33.5-44.7 kW) | | |
| Cutting Edge Design | Reversible/ Replaceable | | |
| Cutting Edge Dimensions | 0.5 x 4.0 in. Steel (12 x 101 mm Steel) | | |
| Skid Shoes | Adjustable/ Replaceable 3/8 in. Steel (9 mm Steel) | | |
| Blower Design | Two Stage | | |

*Front lift kit and PTO driveline kit are required for operation of the front mount snowblower attachment.
**Compatible with CT4045 HST, CT4050 HST and CT4058 HST models only.

Bobcat provides you access to a world of Bobcat implements and front-end loader attachments – so you can get the most work from your tractor investment. Whether it's moving snow, installing a fence or taking care of animals, when you have the right tractor and the right implement or attachment, there is virtually no task that's beyond your ability.

There are more than 550 dealer locations in North America, so you're never far from an expert source of implements, attachments, accessories, parts and service.





Quick hitch



Rear ballast



Tine rake





3 pt. finish mower



3 pt. rotary cutter

3 pt. box blade



3 pt. tiller





3 pt. angle blade



You can customize and accessorize your Bobcat compact tractor to improve productivity, enhance durability, maximize operator comfort and more. Simply choose options and accessories* that match your unique demands.

| MODEL | CATEGORY | OPTION LIST | | |
|--------------------------------------|--------------------------|--------------------------------------|--|--|
| CT4045 CT4050 CT4055 | Field Cab & Options | Field Cab - (SST only) | | |
| | | CD Player for Field Cab | | |
| | | Rear Wiper Kit | | |
| | | Beacon | | |
| CT4045 CT4050 CT4055 CT4058 | Options & Accessories | Single Remote Hydraulic V/V (Detent) | | |
| | | Second Remote Hydraulic V/V (Detent) | | |
| | | Front Third Function Hydraulic Kit | | |
| | | Rear Working Light Kit | | |
| | | Power Socket Kit | | |
| | | 3 Pin Socket Kit | | |
| | | 7 Pin Socket Kit | | |
| | | Rearview Mirror Kit | | |
| | | Canopy | | |
| | | Draw Bar Kit (U) | | |
| | | Front Working Light Kit | | |
| | | Jumper Starter Kit (SST only) | | |

* Options and accessories are subject to change.



Seeder

13


3 pt. snowblower

SPECIFICATIONS

| | 1 | 1 1 | | 1 | 1 | 1 |
|---|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| | 6 | 6 | 6 | 646 | 4 | 6 |
| Model | CT4045 HST | CT4045 SST | CT4050 HST | CT4050 SST | CT4055 SST | CT4058 HST |
| Engine | Diesel | Diesel | Diesel | Diesel | Diesel | Diesel |
| Gross Horsepower | 44.9 hp (33.5 kW) | 44.9 hp (33.5 kW) | 50.3 hp (37.3 kW) | 50.3 hp (37.3 kW) | 55.0 hp (41.0 kW) | 57.7 hp (43.0 kW) |
| No. of Cylinders | 3 | 3 | 3 | 3 | 3 | 3 |
| Total Displacement | 111.4 cu. in. (1.8 L) |
| Fuel Tank Capacity | 12.7 gal. (48.0 L) | 11.9 gal. (45.0 L) | 12.7 gal. (48.0 L) | 11.9 gal. (45.0 L) | 11.9 gal. (45.0 L) | 12.7 gal. (48.0 L) |
| 3-Point, PTO & Hydraulics | | | | | | |
| PTO Horsepower | 32.8 hp (24.5 kW) | 41.6 hp (31.0 kW) | 39.3 hp (29.3 kW) | 45.6 hp (34.0 kW) | 49.6 hp (37.0 kW) | 45.1 hp (33.7 kW) |
| 3-Point Hitch | Category 1 |
| Lift Control Type | Hydraulic Position Control System |
| 3-Point Lift Capacity | 2716 lb. (1232 kg) |
| Rear PTO | 540 rpm |
| Rear PTO System | Independent | Independent | Independent | Independent | Independent | Independent |
| Mid-PTO | Optional: 2119 rpm | _ | Optional: 2119 rpm | _ | _ | Optional: 2119 rpm |
| Total Hydraulic Pump Capacity | 16.5 gpm (62.4 L/min.) | 14.1 gpm (53.4 L/min.) | 16.5 gpm (62.4 L/min.) | 16.5 gpm (62.4 L/min.) | 14.1 gpm (53.4 L/min.) | 16.5 gpm (62.5 L/min. |
| Rear Hydraulics | 1 Pair Std (2nd Pair Opt) | Opt 2 Pairs | 1 Pair Std (2nd Pair Opt) | Opt 2 Pairs | Opt 2 Pairs | 1 Pair Std (2nd Pair Op |
| 3-Point Link Stabilizers | Turnbuckle | Turnbuckle | Turnbuckle | Turnbuckle | Turnbuckle | Turnbuckle |
| Lower Links | Rigid | Rigid | Rigid | Rigid | Rigid | Rigid |
| Lifting Rod | Turnbuckle | Turnbuckle | Turnbuckle | Turnbuckle | Turnbuckle | Turnbuckle |
| Drive System | | | | | | |
| Standard Transmission | 3-Range HST | 8F X 8R Synchro | 3-Range HST | 8F X 8R Synchro | 8F X 8R Synchro | 3-Range HST |
| Brakes | Wet Multi-disc |
| Rear Differential Lock | Std | Std | Std | Std | Std | Std |
| Four-Wheel Drive | Std | Std | Std | Std | Std | Std |
| Travel Speeds (w/ Ind. Tires) | | | | | | |
| • • • • | 18.5 mph | 17.5 mph | 18.5 mph | 17.5 mph | 17.5 mph | 18.5 mph |
| Forward | (29.7 km/hr.) | (28.2 km/hr.) | (29.7 km/hr.) | (28.2 km/hr.) | (28.2 km/hr.) | (29.7 km/hr.) |
| Reverse | 12.9 mph (20.8 km/hr.) | 17.1 mph (27.6 km/hr.) | 12.9 mph (20.8 km/hr.) | 17.1 mph (27.5 km/hr.) | 17.1 mph (27.1 km/hr.) | 12.9 mph (20.8 km/hr.) |
| Dimensions | | | | | | |
| Overall Length (w/ 3 pt.) Overall Width | 125.5 in. (3189 mm) |
| Ag Tires | 67.0 in. (1702 mm) |
| Industrial Tires | 69.8 in. (1722 mm) |
| Turf Tires | 72.2 in. (1834 mm) |
| Overall Height | 97.4 in. (2473 mm) |
| Wheelbase | 71.2 in. (1810 mm) |
| Ground Clearance | , | , | , , | , | , | , , |
| (w/ industrial tires) | 15.3 in. (387 mm) |
| Weight | 3745 lb. (1698 kg) |
| Steering | Hydrostatic Power Steering | Hydrostatic Power Steering | Hydrostatic Power Steering | Hydrostatic Power Steering | Hydrostatic Power Steering | Hydrostatic Power Steering |
| Inside Turning Radius (w/ assisted braking) | 103.5 in. (2630 mm) |
| Tilt Steering Wheel Safety Equipment | Std | Std | Std | Std | Std | Std |
| Safety Interlock System (neutral start-operating) | Std | Std | Std | Std | Std | Std |
| Fold Down ROPS (roll-over protective structure) | Std | Std | Std | Std | Std | Std |
| Fully Retractable Seat Belt | Std | Std | Std | Std | Std | Std |
| Features Adjustable Seat | Std | Std | Std | Std | Std | Std |
| Cup Holder | Std | Std | Std | Std | Std | Std |
| | | | | | | |
| Glow Plug Engine Pre-heat | Std Std | Std | Std | Std | Std Std | Std |
| Toolbox Head Lights/Tail Lights/ | Std | Std | Std | Std | Std | Std |
| Brake Lights | Std | Std | Std | Std | Std | Std |
| Cruise Control | Opt | _ | Opt | _ | _ | Opt |
| Spark Arrestor Muffler | Std | Std | Std | Std | Std | Std |
| Horn/Hazard Flasher/Turn Signals | Std | Std | Std | Std | Std | Std |
| Rear Working Light | Opt | Opt | Opt | Opt | Opt | Opt |
| Side Mirror | Opt | Opt | Opt | Opt | Opt | Opt |



B O B C A T T I M E L I N E

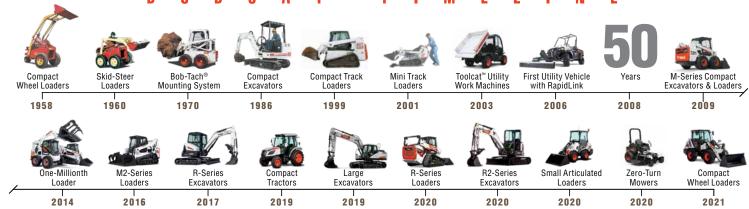

*Note: Hydraulic 3 pt. lift capacity will vary depending on lift point height.



YOU ARE ANIMAL

Everything we put into Bobcat equipment is designed to make more of whatever you bring to the job. Whether it's strength, versatility, speed or agility, it's built around you.

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors.



Bobcat Company is a member of the Doosan Group. Doosan is a global leader in construction, grounds maintenance and material handling equipment, power and water solutions, and engineering that has proudly served customers and communities for more than a century.

Bobcat**, the Bobcat logo and the colors of the Bobcat machine are registered trademarks of Bobcat Company in the United States and various other countries.

©2022 Bobcat Company, All rights reserved.





